

**Note**

Due to the hazardous nature of the products generally transported in this container and due to the risk of compatibility with cleaning products we are not in a position to recommend any cleaning process.

The vessel material is carbon steel which, when exposed to moisture will immediately start oxidizing (corroding).

Whenever the tank is inspected for cleanliness or the manlid removed for whatever reason, it is essential that the tank be filled with product or purged with Nitrogen immediately after closure of manlid. In no case should this period be longer than 4 - 6 hours (depending on the moisture content of the air and the ambient temperature).

**Should the vessel need to be shotblasted on the inside the following precaution should be taken:**

**i)** The gas and liquid phase valves E, F, C and D should be removed from the vessel and be stored in a dust free environment. Please note that the complete gas line manifold and valves can be removed as a unit and need not be separated. The same applies to the liquid line manifold and valves.

**ii)** The safety relief valve should be removed from the vessel and stored in a dust free environment.

**iii)** The gas and liquid suction tubes on the inside of the tank are made of 304L stainless and should not be shotblasted with carbon steel particles and should thus be protected during shotblasting.

**iv)** These pipes should be pickled and passivated after shotblasting and thoroughly cleaned with a pipe brush and solvent on the inside to remove all dust and particles.

**IMPORTANT**

A. Dust or particles could lodge on the sealing surfaced of the excess flow valves and could cause leakage, therefore the inside of the tank should be carefully vacuum cleaned and the suction tube meticulously cleaned on the inside before replacing the valves and filling the vessel.

B. Never blow off purging through the liquid phase, use the gas phase for this purpose.



**printing:** for best results use these links to download as PDF



download page



download section


### RECOMMENDATIONS

- Before any filling operations:  
 Make sure that the tank is empty and gas-free.  
 Connect the earth wire to the earth points provided on the tank frame.  
 When filling has been completed and/or filling pipes have been removed:  
 Disconnect the earth wire;  
 Apply TIR seals to all sealing points.


### Filling and Emptying with Product



**enlarge**  
 Open the valve cabinet doors X and Y

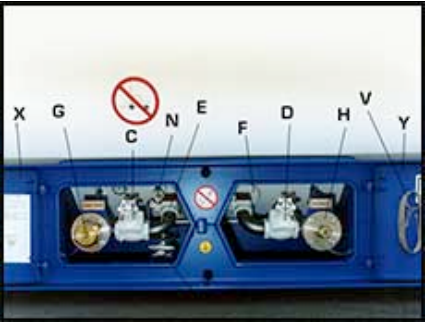

**enlarge**

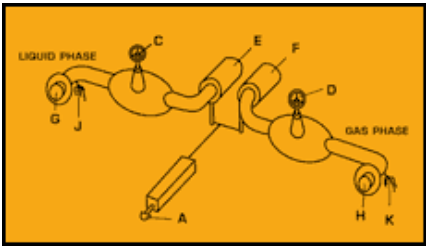

### REMOTE CONTROL

The remote control cable V should be hooked onto ring N. In an emergency a sharp pull on the remote cable will automatically close off the excess flow valves E and F.

**enlarge**

### FILLING FOR TRANSPORT UNDER INERT GAS

Follow the instructions under Filling.

#### A. PURGING WITH NITROGEN:

- Always fill through the liquid line and bleed off through the gas line;
- Dry Nitrogen (dew point -20°C) should be used for transport under inert gas. The main reason for this is to prevent any oxidization of the bare carbon steel on the inside of the tank;
- The most accurate procedure during purging is to use an Oxygen % metre at the gas line outlet. Purging with nitrogen should continue until the Oxygen content registers less than 2%. If an Oxygen % metre is not available, the following can be used as a guideline:- Duration of bleeding before closure of gas line: approximately 10-12 min;

- Care should be taken that liquid Nitrogen does not enter the gastank (indicated by freezing of the nitrogen feed line);
- To prevent this the Nitrogen volume flow should be controlled in order not to overstep the Nitrogen storage tank evaporator capacity. Once the oxygen has been displaced, close off the gas phase globe valve D and allow the pressure to build up to between 1 and 2 bar. Once this pressure is reached, close the excess flow valves by pushing back handle A following the instructions for closing under Filling or Emptying.

### Filling or Emptying

The following filling instructions are clearly indicated on the inside of door.

#### A. Opening

1. Bleed off any pressure in the manifolds by opening and closing of valves 'J' & 'K'
2. Remove caps 'G' & 'H'
3. Couple 'LIQUID' & 'GAS' hose couplers
4. Pull out handle 'A' to open excess flow valves 'E' & 'F'
5. Operate 'C' & 'D' handwheels to open the globe valves slowly

#### B. Closing

1. Push back handle 'A' valves will close automatically
2. Operate 'C' & 'D' handwheels to close the valves
3. Disconnect 'LIQUID' & 'GAS' hose couplers
4. Screw on caps 'G' & 'H'

### DANGER

Nitrogen is lethal to human life. If a tank is nitrogen purged nobody should attempt to enter this tank unless it has been vented and tested before. Nitrogen will cause collapse and death within minutes.

## Frame

### THE TORQUE SETTINGS FOR THE VARIOUS FRAME FASTENERS ARE ILLUSTRATED BELOW:

Under normal conditions bolts are torqued using a torque wrench. In order to evaluate the correct torque setting the friction resistance of the thread to nut interface needs to be accurately known. In the automotive engine area where parts are cleaned and fairly greasy, this resistance is accurately determinable. Where tank containers have been in marine conditions the re-torquing of bolts should be carried out by the turn of nut method. This method induces an extension of the bolt by applying prescribed rotation of the nut on the bolt. To be effective the head and the nut must have a solid base to react against. The bolt and connection piece are pulled into close contact called a snug tight condition. After suitable marks are made so that the subsequent rotation between the bolt and nut may be observed the nut is subjected to appropriate rotation, depending on the grip length. It is important that the grade of bolt is confirmed to be 10.9 where necessary.

### Flanges

All the flanges listed below are manufactured in SA 350 LF2 material.

- (a) Manlid and cover
- (b) Safety relief valve flange
- (c) Liquid phase flange
- (d) Gas phase flange
- (e) Pressure gauge flange
- (f) Temperature gauge flange
- (g) Rochester gauge flange.

### Replacement of Manlid Gasket

The repair procedure is as follows :

1. First ensure that there is no pressure inside the vessel and that the vessel has been properly cleaned or decontaminated.
2. Carefully remove the TIR bars welded between 2 sets of manlid nuts (note: mark the position of these TIR bars in order to refit them correctly).
3. Loosen manhole nuts.
4. Remove manlid cover.

### REPLACEMENT

5. Remove all traces of silicone sealer on lid and manlid. Take care not to damage painted surfaces. Also avoid damage to the manlid sealing surface.
6. Place gasket into manlid groove. Do not use grease to keep the gasket in position.

With regard to the end frame, the four topmost bolts labelled A in the accompanying sketch are M18 grade 10.9 with a grip length of 13 mm and should be tightened from a snug tight condition to a fully tight position by, turning the nut 100° or one-third of a turn, or two flats.

With regard to the M20 grade 10.9 at position C this has a joint thickness of 24 mm and the nut should be turned from a snug tight position to a fully tight position by turning it to 180° or half of a turn. or three flats. With regard to the conical mounts these should be tightened from a snug position by pre-tensioning the rubber by 2.5 mm.

The 4 bolts holding the plate to the castellated beam are grade 8.8 and these should be torqued to a nominal 420 Nm with a rotational set of 100°, whichever is the greater.

The top bolt on the top centre mount labelled D in the accompanying sketch is an M36 and is fitted onto a rubber bush. The bolt is in shear alone and should only be tightened so that it fits snugly to the washer without unduly squashing the rubber out from underneath it.

### Manlid

The 500 NB manlid is fastened with 20 x M20 studs and nuts.

These studs and nuts are manufactured to the following specification:

**Studs** : SA 320 Grade L7  
**Nuts** : SA 194 Grade 4

### 8. Fit manlid cover.





9. Put Loctite thread lock on all the manlid stud threads protruding through the manlid cover. Also put silicone sealant around the bottom of the stud stems to close of the gap between the stud hole and the stud in order to prevent water penetration.

10. Fit the nuts onto the manlid studs and tighten hand tight in cross order sequence.

11. Remove the excess silicone sealant but make sure the gap between the manlid forging is sealed all round with silicone. Use a torque wrench and finally tighten the manlid nuts in cross order sequence to 250 Nm.

12. Repair all paint damage to the manlid and nuts with a zinc rich primer and top coat paint system or an intermediate and top coat paint system. The vessels are painted with an Hempatex paint made by Hempel, Denmark.

## Gas Tanks GA Drawings

-  24,500 ltr
-  24,600 ltr
-  24,600 ltr
-  24,600 ltr

- Frame
- Flanges
- Manlid
- Tank
- Replacement of Manlid Gasket
- Sun Shield
- Gas Phase Valve Replacement
- Liquid Phase Valve Replacement
- Safety Relief Valve
- Paint

### FRAME

The frame is a welded construction of low carbon steel elements BS 4360 Grade 50C and 43C.

The frame is designed by Containereering, Paris. IMPORTANT Although looking the same, the IMO 5 Containereering frame is not interchangeable with the IMO 1 Containereering frame.

The frame is bolted to the vessel through the patented Containereering "Multidirectional Suspension Units".

This design makes for easy separation of the vessel from the frame, whether for maintenance or repairs.

### TANK

This tank is a "U" stamp built vessel designed to ASME Section VIII Division 1 code.

Any repairs or welding to the tank must be performed by an approved workshop with an "R" stamp (ASME repair) authorisation, registered and approved by an internationally recognised third party inspection authority. Note: It is imperative that a repair procedure manual is requested from the manufacturer before commencement of a repair. The vessel shell and dished end materials are SA 612.

The gasket and sealing surfaces must be absolutely clean.

7. Put silicone sealer all round the outer perimeter of the manhole forging - apply generously.

### Gas Phase Valve Replacement

---

The gas phase manifold assembly consists of the following components (in sequence from vessel to hose coupling):

- (a) Fisher C427T-16-10 (2") internal safety excess flow valve screwed into a bolt on flange.
- (b) Stainless 304 40 NB schedule 80 threaded pipe connection.
- (c) Fisher 310T-16 (2") globe valve.
- (d) Threaded pipe connection in stainless 304 pipe 40 NB schedule 80.
- (e) ACME 1 3/4" connector bolted to the threaded plate connection. Body in stainless steel 304L and cap in cadmium plated carbon steel.

### Safety Relief Valve

---

This vessel is equipped with a Mecathermic 140370 (3") or Fort Vale 004/23995 safety relief valve in stainless steel 304L.

A rupture disc is fitted. This relief valve can accept an Elfab Hughes RK80 or Continental Disc or equivalent rupture disc without any modification. A pressure gauge is provided on the relief valve body flange.

The relief valve is set to start to discharge at pressure of 22 bar.

The relief valve is bolted to the vessel by means of 8 x M24 stainless bolts - each torqued to 185 Nm. Sealing is obtained by means of a PTFE 3 mm gasket. Should the valve be removed, it is essential during replacement that the stainless TIR bar be welded to 2 adjacent safety relief valve bolts in order to satisfy custom's requirements. A new PTFE gasket must be used every time.

13. Weld the TIR bars back in the positions marked earlier.

### Liquid Phase Valve Replacement

---

The liquid phase manifold assembly consists of the following components (in sequence from vessel to hose coupling):

- (a) Fisher C427T-16-25 (2") safety internal excess flow valve screwed into a bolt on flange.
- (b) Threaded pipe connection in 304L 40 NB schedule 80 pipe.
- (c) Fisher 310T-16 (2") globe valve.
- (d) Threaded pipe connection in 304L 40 NB schedule 80 pipe.
- (e) ACME 3 1/4" connector bolted to the threaded pipe connection (d). Body in stainless steel 304L and cap in cadmium plated carbon steel.

### Paint

---

Hempel paint systems are used on both vessel and frame.

The specifics of the Hempel system is clearly indicated under technical specification.

All repairs and touch-ups must be done with compatible Hempel paints.

For the best advice regarding repairs and touch-ups, contact ACL

**Click for Contact information**

### Sun Shield

No insulation is provided on this IMO 5 tank, but only a sun shield. This sun shield must under no circumstances be removed as this will result in a vessel with a lower MAWP (Maximum Allowable Working Pressure). The reason for this is the design reference temperatures stipulated by the IMDG Code : ie. 55°C for a vessel with sun shield and 65°C for a vessel without sun shield. The 22 bar design of this vessel for the products (as per product) has been done taking this sun shield into consideration. The sun shield is made of 2 mm thick aluminium sheeting Grade 5251 H6 (Marine Grade).

The rivets used are made of 304L stainless steel.

---

### GASKET

All flanged connections are sealed by using 3 mm thick PTFE gaskets . All threaded connections are sealed by using Loctite 572 PTFE sealer.

---

### TORQUE SETTINGS

All threaded connections must be carefully tightened until the correct alignments of the respective parts are obtained. DO NOT OVER TIGHTEN THREADED CONNECTIONS. This will lead to damaged threads and improper sealing.

**Technical Characteristics**
**CAPACITY**

Nominal : 24 700 litre  
Tolerance : 1%A2.

**UNLADEN MASS**

Maximum : 9 800 kg  
Tolerance : 1%A3.

**MAXIMUM GROSS WEIGHT**

Standard : 34 000 kgA4.

**PRESSURE RATING**

Design pressure (MAWP) : 22 Bar  
Test pressure : 36 BarA5.

**DIMENSIONS**

Outside diameter vessel : 2 410 mm  
Outside vessel length : 6 030 mmA6.

**DESIGN**

Design code : ASME VIII Div 1

M D M T : -40°C

Reference : 55°C

**MOUNTING**

The tank container is mounted using the unique and patented Containereering multi-directional suspension system, allowing for the isolation of movement between frame and tank.A9.

**Manlid/Safety Relief Valves**
**MANLID ASSEMBLY**

Tank fitted with : 500 NB diameter manlidB2.

**SAFETY RELIEF ASSEMBLY**

Relief valve : Fort Vale 004/2.

Pressure Setting : 22 Bar

Valve size : 80 mm (3")

Rupture Discs : Continental Disc in Stainless Steel

Manometer : Yes - Graduation 0 - 30 Bar

Protection cover : Yes

**Discharge Systems**
**BOTTOM DISCHARGE**

All valves are fitted below the liquid level and grouped together on the vessel side, enclosed by a bolt on TIR closure.

**Valves**
**MATERIALS OF CONSTRUCTION**

Tank shell : SA 612

Minimum thickness 19,1 mm

Tank ends : SA 612 Hot formed

Minimum thickness 17,7 mm

Framework : Grades of low carbon steel, main structural elements BS 4360 Grade 50C or 43C or equivalent

Manhole and flanges : SA 350 LF 2

Internal piping : Stainless steel 304L 50 NB, sched 40

Sunshield : Marine Grade Aluminium

Baffle supports : SA 612 (6 mm)

**MODULE DIMENSIONS**
**To ISO**

: Length 6 058 mm (nominally 20ft)

: Width 2 438 mm ( 8'0")

: Height 2 591 mm ( 8'6")

**RADIOGRAPHY**

Ends : 100 %

Shells : 100 %A11.

**JOINT EFFICIENCY**

Ends : 1.00

Shell : 1.00A12.

**CORNER CASTINGS**

To ISO 1161

**Heat Treatment**

The complete vessel will be stress relieved after manufacture.

**Sunshield**

A Marine Grade Aluminium sunshield (2 mm) with a 120 degree included angle at spacing 40 mm from vessel is provided.

**ACCESSORIES**
**DOCUMENT BOX**

A PVC Document Box is fitted on left lower rear of frame.

**EARTH CONNECTION**

One (1) stainless steel strap connecting tank to frame is fitted.

**EARTH POINT**

Tank frame fitted with a stainless steel earthing point on the lower rear.

**VOLUME**

The capacity of each container is determined and used for data plate marking.

**CUSTOMS SEALING**

Manhole, discharge valves and relief valves are provided with Customs sealing devices.

**TEMPERATURE GAUGE**

Provision to fit a temperature gauge : Yes

**PRESSURE GAUGE**

Oil filled 0 to 40 bar mounted to the tank through an orifice of 1 mm and " " ball valve or equivalent.

**VOLUMETRIC GAUGE**

Provision to fit Rochester gauge.

**FINISHING / PAINTING OF VESSEL AND FRAME**
**INTERIOR FINISH**

The interior of the vessel will be shotblasted to SA 2.5 and will be delivered in a nitrogen purged condition. Dry Nitrogen (0,2 < 1 % residual oxygen, 1 bar pressure, dew point Nitrogen -20°C) will be used for purging.

**EXTERIOR FINISH**

All external tank welds to be left "as welded".

The external surface of the vessel will be shotblasted to SA 2.5 before the application of the primer.

**Prime coat** : Hempadur Zinc 1856 - 40 micron dft

**Top coat** : Hempatex Hi-Build 4641 - 80 micron dft

**FRAME FINISH**

**Shotblast** : The entire framework shotblast to be carried out in warm dry weather, utilising air free of moisture to a shotblast condition equivalent to Grade SA 2,5.

**Prime coat** : Hempadur Zinc 1856 - 40 micron dft

**GAS LINE**

1. 1 x Fisher C427T-16-10 2" internal safety valve with Fisher P651 cable controls.
2. 1 x Fisher N310T-16 2" ball valve.
3. 1 x 1 3/4" flanged connector in S/S 304L.
4. All gaskets and sealing in Teflon (PTFE).
5. Loctite PTFE sealer to be used on threaded connections.
6. Remote control latches (10 m stainless cable) will be located in the valve compartment.
7. A Fisher fire safe fuse on the remote controls will be provided

**LIQUID LINE**

1. 1 x Fisher C427T-16-25 2" internal safety valve with Fisher P651 cable controls.
2. 1 x Fisher N310T-16 2" ball valve.
3. 1 x 3 1/4" flanged connector in S/S 304L.
4. All gaskets and sealing in Teflon (PTFE).
5. Loctite PTFE sealer to be used on all threaded connections.
6. Remote control latch (10 m stainless cable) will be located inside the valve compartment.
7. A Fisher fire safe fuse on the remote controls will be provided.

**Top coat** : Hempatex Hi-Build  
4641 - 80 micron dft

**INTERNAL PIPING**

All internal piping is in stainless steel 304L 50 NB schedule 40. The internal piping will be flanged connected to the reducer in order to make it fully demountable.

**printing:** for best results use these links to download as PDF



download page



download section

This container is an IMO 5 type designed for the international transportation of some liquefied gases of IMDG classes 2.1, 2.2 and 2.3. These products are allowed to be transported within the limit of the regulations and according to equipment options.

All gaskets that are in contact with the liquid are in PTFE which is compatible with a wide range of products. However, it is the user's responsibility to ensure that the gaskets used are compatible with the product carried.

The approved product list for a 24,500 litre Gas Tank with a MAWP of 22 Bar and a Test pressure of 36 Bar is as follows:

Identification No.	Hazardous Material Description Proper Shipping Name	IMDG	ADR/RID	DOT	Hazard Class Division	Filling Ratio kg/l	Max Load* With Baffles	Max Load*s Without Baffle	Rupture Disc
UN 1005	Ammonia, anhydrous, liquified	X	X	X	2,3	0,53	23191 kg	22791 kg	Yes
UN 1010	Butadienes, inhibited	X	X	X	2,1	0,55	23685 kg	23285 kg	No
UN 1011	Butane	X	X	X	2,1	0,51	22697 kg	22297 kg	No
UN 1012	Butylene	X	X	X	2,1	0,53	23191 kg	22791 kg	No
UN 1018	Chlorodifluoromethane, R22	X	X	X	2,2	1,03	34000 kg	34000 kg	No
UN 1020	Chloropentafluoroethane, R115	X	X	X	2,2	1,06	34000 kg	34000 kg	No
UN 1027	Cyclopropane, liquified	X	X	X	2,1	0,53	23191 kg	22791 kg	No
UN 1028	Dichlorodifluoromethane, R12	X	X	X	2,2	1,15	34000 kg	34000 kg	No
UN 1030	Difluoroethane, R152a	X	X	X	2,1	0,79	29613 kg	29213 kg	No
UN 1032	Dimethylamine, anhydrous	X	X	X	2,1	0,59	24673 kg	24273 kg	No
UN 1033	Dimethyl ether	X	X	X	2,1	0,58	24426 kg	24026 kg	No
UN 1036	Ethylamine	X	X	X	2,1	0,61	25167 kg	24767 kg	No
UN 1037	Ethylchloride	X	X	X	2,1	0,80	29860 kg	29460 kg	No
UN 1055	Isobutylene	X	X	X	2,1	0,52	22944 kg	22544 kg	No
UN 1060	Methylacetylene and propadiene mixtures, stabilized	X	X	X	2,1	0,43	20721 kg	20321 kg	No
UN 1061	Methylamine, anhydrous	X	X	X	2,1	0,58	24426 kg	24026 kg	No
UN 1063	Methyl chloride, R40	X	X	X	2,1	0,81	30107 kg	29707 kg	No
UN 1064	Methyl Mercaptan	X	X	X	2,3	0,78	29366 kg	28966 kg	Yes
UN 1075	Liquified petroleum gas	X	X	X	2,1	-	-	-	No
UN 1077	Propylene	X	X	X	2,1	0,43	20721 kg	20321 kg	No
UN 1083	Trimethylamine, anhydrous	X	X	X	2,1	0,56	23932 kg	23532 kg	No
UN 1086	Vinyl chloride, inhibited	X	X	X	2,1	0,81	30107 kg	29707 kg	No
UN 1087	Vinyl methyl ether, inhibited	X	X	X	2,1	0,67	26649 kg	26249 kg	No
UN 1969	Isobutane or Isobutane mixtures	X	X	X	2,1	0,49	22203 kg	21803 kg	No
UN 1978	Propane	X	X	X	2,1	0,42	20474 kg	20074 kg	No
UN 2517	Chlorodifluoroethanes R142	X	X	X	2,1	0,99	34000 kg	34000 kg	No
UN 2602	Dichlorodifluoromethane and difluoroethane azeotropic mixture, R500	X	X	X	2,2	1,01	34000 kg	34000 kg	No
UN 3159	Tetrafluoroethane, R134a	X	X	X	2,2	1,04	34000 kg	34000 kg	No

\* Max Load = Payload + Tare

Click on an image to enlarge in a pop up window

